**Use:**

Ventilation or exhaust in low- and medium-pressure installations

Assembly:

On rectangular ventilation ducts, on walls or ceilings. Fixing with the use of visible bolts in embossed inlets in head frames or without visible bolts with a snap-on fixing in an additional installation frame RM (unadvisable for mounting in ceilings).

Construction:

Head frame and inner protective screen made of embossed aluminium shapes. Mounting blades on solid levels - KSH-90°-al or at the angle of 45° - KSH- 45°-al.

Material:

Aluminium, alloy 6063.

Surface finishing:

Colourless powder varnish layer or in a colour in accordance with the catalogue RAL.



Flow adjustment:

With the use of contra-rotation damper type P. Setting air flow takes place from face without the necessity of dismantling a grille.


Certificates:

Technical recommendation: RT-ITB-1147/2009


Hygiene certificate: HK/B/1705/02/2008

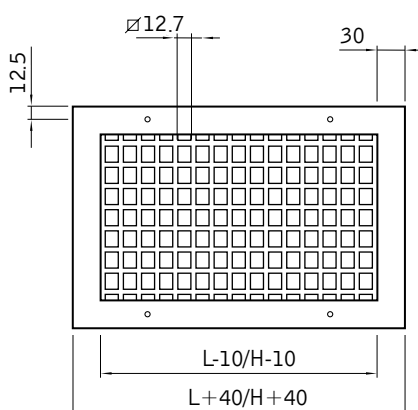Dimensions and type marking:

KSH-RS-90°-al



KSH-RS-45°-al



KSH-RS-90°-al-P