

**Use:**

Air intake or exhaust in low and medium pressure systems.

**Fitting:**

On rectangular air ducts and in walls. Fitted using visible screws in holes pressed in the front frame, or without visible screws using an additional pressed-in fixture RM frame.

**Construction:**

Front frame and blades made of pressed aluminium profiles. Blades fixed at 45°. Reinforced structure allows using the grille in gyms, garages, boiler rooms. This type can be used as external intake.

**Material:**

Aluminium, alloy 6063.

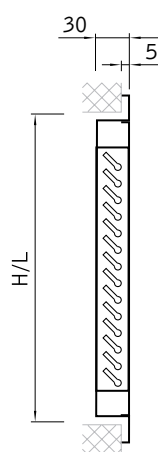
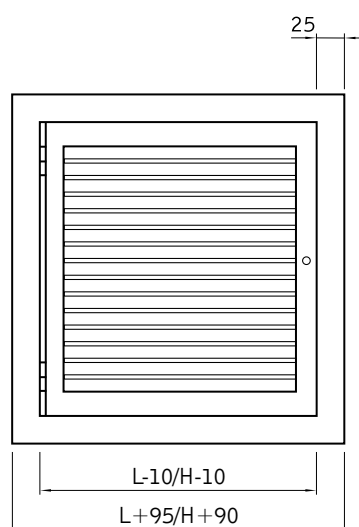
**Surface finish:**

Naturally anodised aluminium or powder coat coloured according to RAL catalogue.

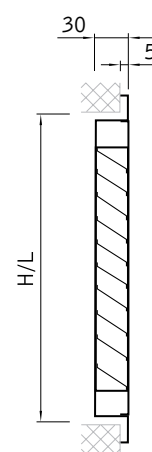
**Certificates:**

Technical recommendation: RT-ITB-1147/2009

Hygiene certificate: HK/B/1705/02/2008

**Dimensions and type marking:**

KSH-R-al-1



KSH-R-al-2