

Noise characteristics for air supply valves KE

Noise level L_w

KE	Correctional coefficient (dB)						
	Average frequency in octaves (Hz)						
	125	250	500	1000	2000	4000	8000
80	2	2	1	0	-3	-9	-17
100	4	3	2	0	-7	-15	-30
125	2	7	3	-2	-10	-20	-32
160	5	7	3	-2	-10	-19	-32
200	8	6	4	-3	-10	-19	-32
tol.±	3	2	2	2	2	2	3

tol. – tolerance

We obtain noise level distribution after adding the Koct correctional coefficient given in the chart to the total acoustic pressure L_{p10A} , dB(A), according to the below formula:

$$L_{woc} = L_{p10A} + K_{oc}$$

The value of the correctional coefficient K_{oc} is the average value of frequency range (Hz).

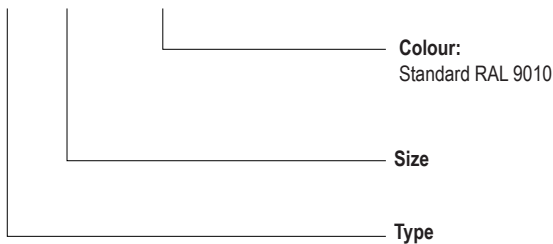
Noise silencing

KE	Regulation (mm)	Noise silencing L							
		Average frequency in octaves (Hz)							
		63	125	250	500	1000	2000	4000	8000
80	-3	24	21	16	12	9	7	5	5
	+3	24	19	13	10	7	4	4	4
	+9	24	19	13	9	6	3	3	4
100	-3	22	17	13	10	8	8	6	9
	+3	21	16	11	8	6	7	4	7
	+9	21	16	11	8	6	6	3	6
125	-9	22	16	11	8	6	5	6	7
	0	20	15	10	7	5	4	3	6
	+9	20	15	9	6	4	3	3	5
160	-3	18	14	9	7	6	7	6	8
	+6	18	13	8	6	5	5	6	6
	+12	18	13	8	5	4	4	5	6
200	-3	16	12	9	8	9	9	9	8
	+9	16	11	8	6	7	7	7	7
	+15	17	11	7	6	6	5	6	6
tol.±		6	3	2	2	2	2	2	3

tol. – tolerance

The chart provides the average noise silencing from the duct to the room accounting for the final reflection At the connector in case of fitting in a ceiling.

Product marking:

KE-160-RAL9006

Example of an order:

KE-160 – Air exhaust valve Ø160 with a fitting ring, colour – RAL 9010.