

Use:

Supply or exhaust in low and medium pressure.

Assembly:

In floor using visible screws or without visible screws in additional mounting frame RM.

Construction:

Frames and blades made from aluminum profile. Fixed blades.. Resistant to heavy loads. Optional: straight air supply KNP-al or 15 degree air supply KNP-al-15°. It is possible to order grille in a form of a dismantlable grid (R) or rolled grid (Z) – embedded in a flangeless frame fixed in the base. Max length – 2mb

Material:

Aluminum, alloy 6063

Surface finish

Anodized aluminum or RAL 9003 white powder coat or other RAL colour according to RAL catalogue on demand.

Air flow regulation:


Flow is regulated by opposed blade damper P. Flow regulation can be made from the front without the necessity of dismantling grilles

Certificates:

Hygienic certificate: BK/K/0926/02/2018

Type and dimension marking:

Dimension L-10 and H-10 it concerns neck of grilles

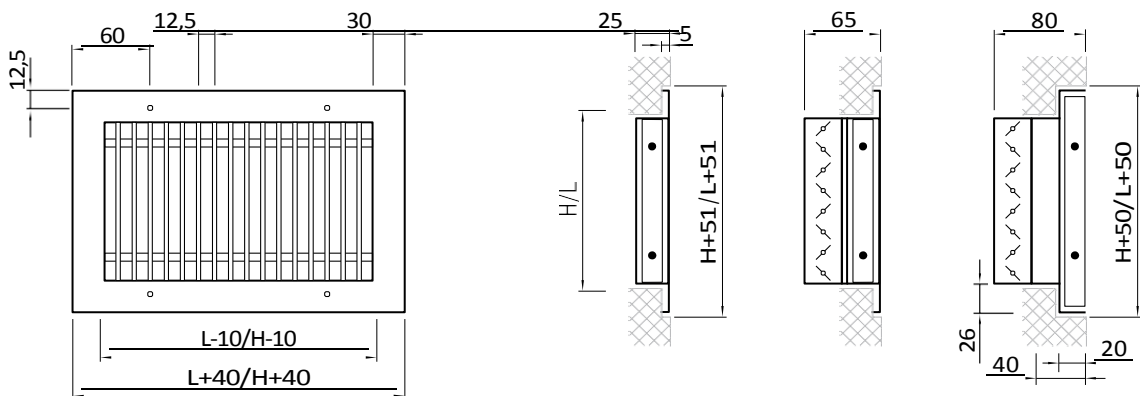

Attention: = 125

H_{min}


KNP-al

KNP-al-P

1) KNP-al-R-P

2) KNP-al-Z-P

Air flow options:



Straight
KNP-al

15degree
KNP-al-15°

