**Use:**

Supply or exhaust in low and medium pressure installation in non aggressive environment with relative humidity up to 70%

Assembly:

On rectangular ducts or plenum box.

Construction:

Segmented vents (standard number: 8, 10, 15, 16, 20, 24, 30, 32, 40, 45, 48, 60, 64, 75 or 90) provide an even distribution of air stream. Different direction of air flow depending on adequate setting of plastic material blades. Standard colour of blades - white. A panel with white blades or without on request. An option to order a diffuser in the form of a panel without the front frame - AWK-W-B

Material:

Black steel sheet, galvanized steel or aluminum

Surface finish


RAL 9003 white powder coat or other RAL colour according to RAL catalogue on demand.

Air flow regulation:

With damper in inlet in plenum box


Certificates:

Hygienic certificate: BK/K/0926/01/2018

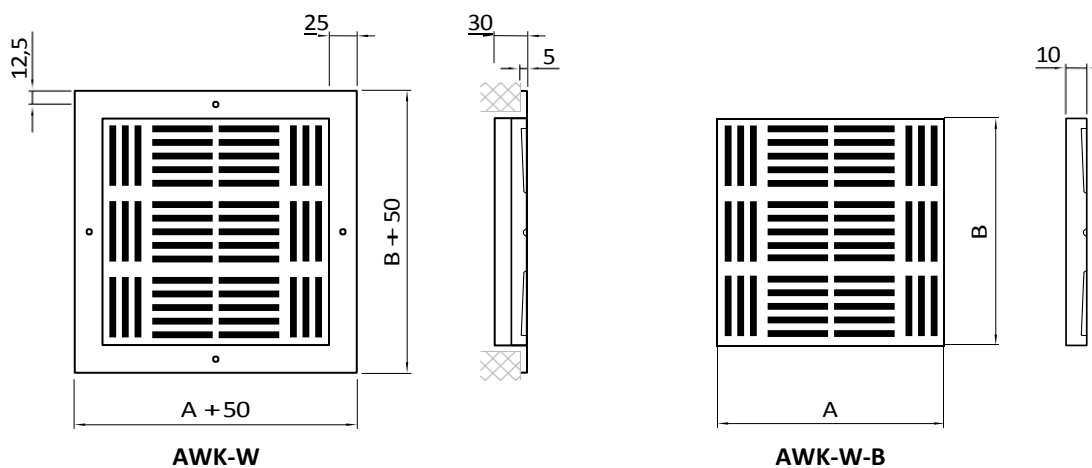
Type and dimension marking:

Multi-directional diffusers AWK-W - variety


Varianty:

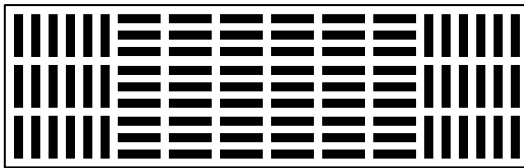

AWK-W-18/5

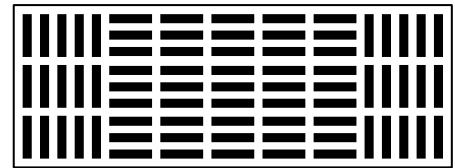


AWK-W-15/5

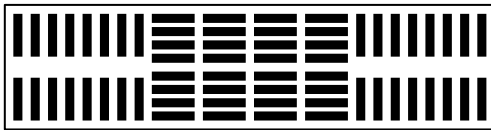


AWK-W-16/4




AWK-W-12/5-C




AWK-W-12/5-A




AWK-W-12/5-B




AWK-W-12/4-B

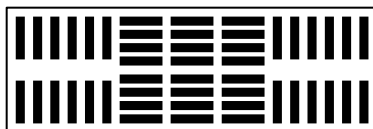


AWK-W-12/4-A




AWK-W-12/4-C




AWK-W-9/5




AWK-W-8/5




AWK-W-8/4




AWK-W-6/5



AWK-W-6/4



AWK-W-4/5



AWK-W-4/4



AWK-W-3/5



AWK-W-2/5




AWK-W-2/4

Multi-directional diffusers AWK-W - technical data

Products range:

A	1105	930	1020	995	570	640	525	775	885	570	750	525	390	460	390	570	390		
B	370		310	260	500	450	445	310	260	370	260	310	370	260			145		
Nr of blades	90	75	64	60			48			45	40	32	30	24	20	16	15	10	8
Nr suply	5	5	4	5			4			5	5	4	5	4	5	4	5	5	4

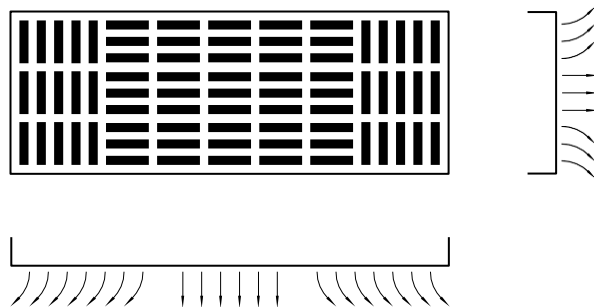Example AWK-W-15/5.**Example AWK-W-12/4-B.**