

**Use:**

Air intake and exhaust on low and medium pressure systems.

Fitting:

In walls, doors and internal window sills. Fitted using visible screws in holes pressed in the front frame or without visible screws using press-in fixture of the additional RM fixing frame.

Construction:

Front frame and blades made of pressed aluminium profiles. Blades fixed horizontally. Resistant to medium loads. Optional manufacturing variants—straight air supply KNK-al or angular air supply KNK-al-15°.

Material:

Aluminium, alloy 6063.

Surface finish:

Naturally anodized aluminium or powder coat coloured according to RAL catalogue.

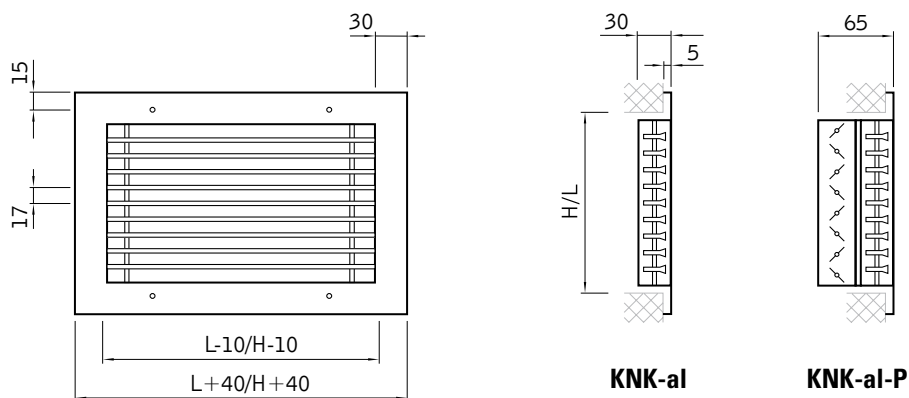
Air flow regulation:

With a counter directional damper type P. Air flow regulation can be made from the front without the necessity of dismantling the grille.

Certificates

Technical recommendation: RT-ITB-1148/2010

Hygiene certificate: HK/B/1844/02/2007

Dimensions and type marking:**Versions of blades:**