

Use:
Air supply or air exhaust in low and medium pressure installations

Fitting:
In floors, fitted using visible screws in holes pressed in the front frame or without visible screws using press-in fixture of the additional RM fixing frame.

Construction:
Front frame and lamellas made of pressed aluminium profiles. Blades fixed horizontally or vertically. Resistant to heavy loads. Optional straight air supply KNP-al or angular air supply KNP-al-15°. It is possible to order the grille in a form of a dismantlable grid embedded in a flangeless R frame fixed in the base.


Material:
Aluminium, alloy 6063.

Surface finish:
Naturally anodized aluminium or powder coat coloured according to RAL catalogue.


Air flow regulation:
With a counter directional damper type P. Air flow regulation can be made from the front without the necessity of dismantling the grille.

Certificates:
Technical recommendation: RT-ITB-1148/2010
Hygiene certificate: HK/B/1844/02/2007


Dimensions and type marking:

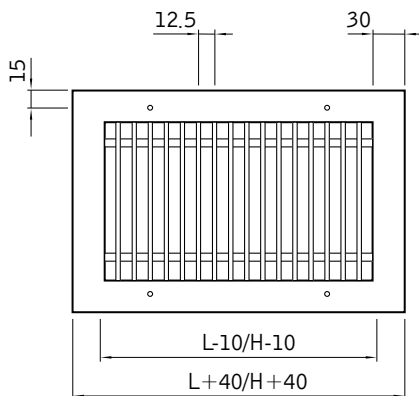


Attention: $H_{min} = 125$

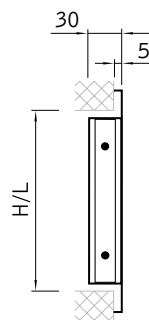

KNP-al




KNP-al-P

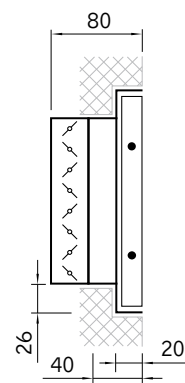


KNP-al-R-P

Blade versions

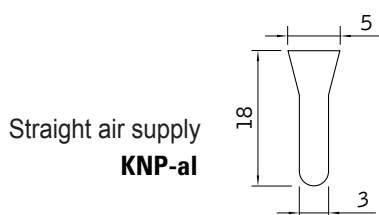

Straight air supply
KNP-al

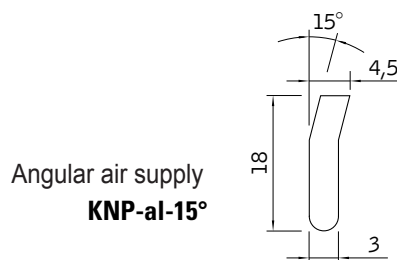

Angular air supply
KNP-al-15°